


FRONT FLUSH PNEUMATIC 90MM INWALL CISTERN

PA111
\$425

PARISI

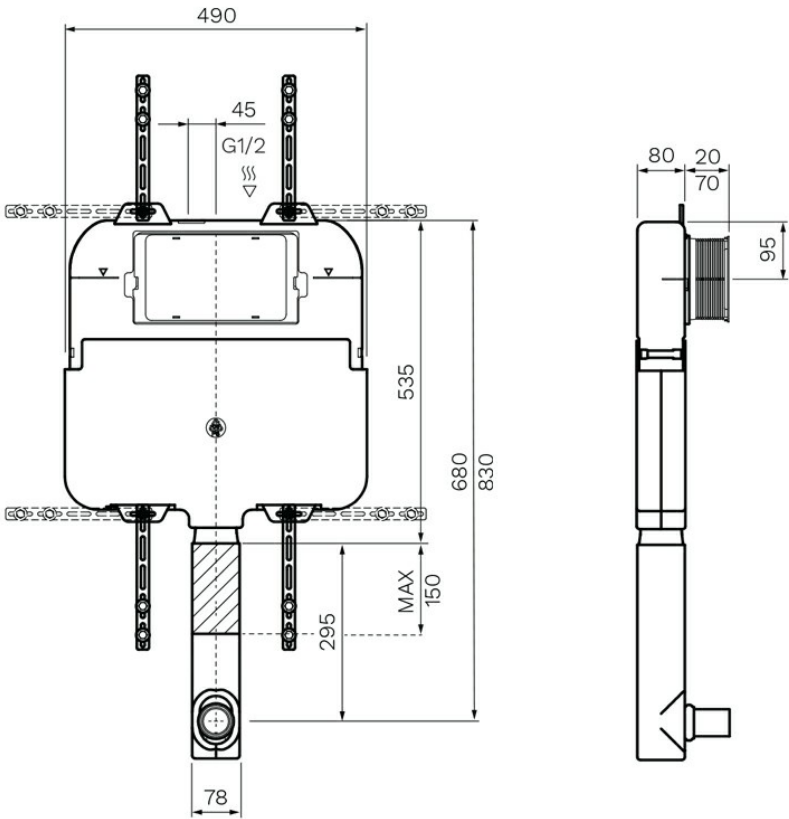

Residential/Light
Commercial Use

Suitable for Residential/Light Commercial Use (Kitchens,
Bathrooms and Laundries in Hotels, Motels and
Retirement Villages).



Guarantee

15 Year Guarantee



4 Star WELS rating
(Toilets)

Allows for a 4.5 litre large flush and a 3 litre half
flush



BPIR - NZS 4121:2001
Toilets

This product complies with Building Code Regulation NZS
4121:2001 Access & Mobility - Toilets



BPIR - B2.3.1
Durability

This product complies with Building Code Regulation
B2.3.1 Durability



BPIR - G1 AS1 2.4
Bidets

This product complies with Building Code Regulation G1
AS1 2.4 Personal Hygiene - Bidets



BPIR - G1.2.2
Flushing Systems

This product complies with Building Code Regulation
Personal Hygiene - Flushing Systems



Additional
Information






The bracket should be mounted flush with the timber
framing so the Villa board will be hard against the
bracket. NB failure to do this may cause the wall to move
and tiles to crack.



Additional
Information

If necessary strengthen the wall using additional
horizontal or vertical nogs and also additional fixings at
floor and ceiling.



	Additional Information	Once the Bracket has been installed, the wall framing should be tested for any deflection. There should not be any deflection.
	Additional Information	The Wall Studs should be nogged in a minimum of three places spaced equally between floor and ceiling.
	Additional Information	The minimum size of Timber framing and Grade is 100mm x 50mm Radiata MSG8, K/D, H1.2, M/g
	Additional Information	The Top and Bottom Timber Framing Plates must be well secured with no movement.
	Additional Information	If using a wall hung pan the wall lining must be a material such as Villa board with a minimum thickness of 9mm.

The Inwall Concealed Cistern (Pneumatic) PA111 is suitable for use with any PARISI wall faced pan. It also provides front actuation push plate access and adjustable height.